



CL4 SERIES

Refrigeration Canopy Luminaire

Installation Instructions

WARNING: Always install fixtures according to National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and could cause damage to the fixture or may result in personal injury.

1. **IMPORTANT:** Turn electricity off at the circuit breaker before installing fixture.
2. Remove the fixture and driver assemblies from the packing box, making sure to inspect the content of the shipment for missing or damaged parts. You have 10 days from receipt of the order to file freight claims for damages or missing items.

PACKING LIST

- CL4 Fixture Assembly
- Fiber Mounting Bolt (Factory Installed)
- Bass Nut for Fiber Bolt
- Mounting Screws
- Load Plate
- J-box
- Driver Assembly (Enclosure and Driver(s))

FIXTURE INSTALLATION

3. Locate the center point of the fixture on the interior surface of the cooler panel.
4. Drill the hole through the cooler panel using the appropriate type of bit for the material being drilled. Use a 7/8" diameter bit.
5. Installing the fiber bolt - Place the end of the power whip into the end of fiber bolt pushing the whip through the bolt. Then place the bolt into the back of the fixture and hand tighten, then use a pair of channel locks to snug the bolt up, take caution not to over tighten the bolt or rough up the bolt threads
6. Feed the whip through the drilled hole in the cooler panel and then feed the fiber bolt into the panel.
7. Mount the fixture to the panel with the mounting screws. Prior to mounting the fixture inspect the gasket to make sure it is in the proper location. Make sure you square the fixture up before installing the four mount screws, do not over tighten the screws and strip them out of the panel, these are only to be snug up the unit until the fiber bolt installation is completed.
8. From the top of the cooler place the load plate over the fiber bolt with the gasket down.
9. Place the junction box over the fiber bolt with the box facing up
10. Install the brass nut on the fiber bolt and snug it into position. Do not over tighten the brass nut as this could damage the fiber bolt. At this time you should return to the fixture to insure the gasket is in place and sealed against the cooler panel.

DRIVER ENCLOSURE INSTALLATION

11. Prior to running your power to the fixture and supply to the driver consult your local building codes.
12. Locate the driver or drivers in a convenient location, if multiple units are being installed you may wish to group the drivers together in one location. The driver is installed in the enclosure from the factory. The enclosure can be mounted directly to the cooler structure or on unistrut. For remote installation of the driver additional driver to fixture cabling can be purchased from Techlight. Note that the cabling is color coordinated to insure the power supply lead polarity to the fixture is not crossed, this will damage the LEDs and possibly the driver voiding your warranty.

Note: Fixture must be installed by a licensed electrician. These instructions do not cover all details or variations in equipment, nor do they provide for every uncertainty related to installation, operation, maintenance, or mounting contingency. Should specific problems occur that are not covered sufficiently for the purchaser's purpose, contact Techlight for additional product or application information. Improper installation and/or utilization may void manufacturer's warranty.



CL4 SERIES


Refrigeration Canopy Luminaire

Installation Instructions


WARNING: Always install fixtures according to National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and could cause damage to the fixture or may result in personal injury.

13. Ensure that the proper supply is attached to the driver.
14. Ensure the driver is connected to the fixture whip, pay attention to the color code and do not cross the leads.
15. If a battery backup system is being installed this unit will be installed at the main power supply to the driver. Follow the installation instruction provided with the battery backup unit.

CL4 Wiring Diagram

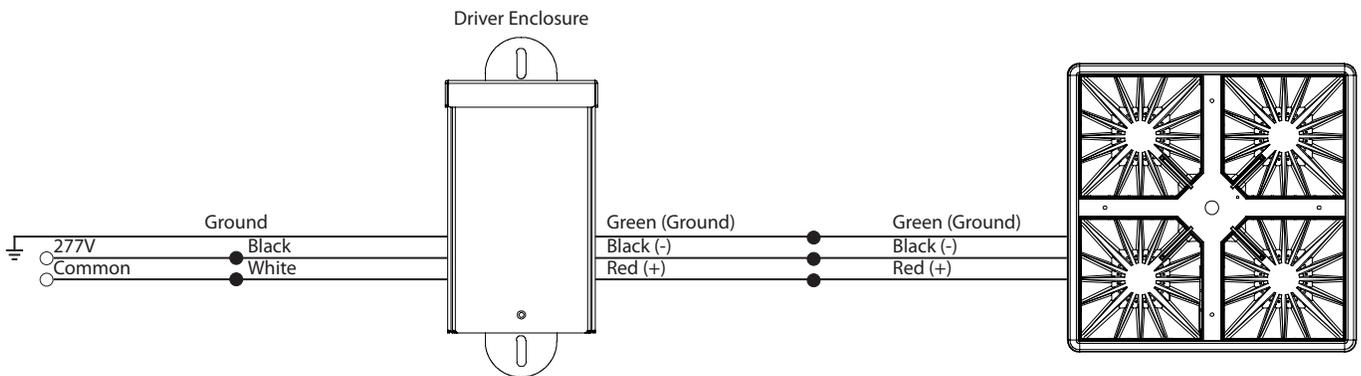

CL4 Wiring Diagram with Occupancy Sensor

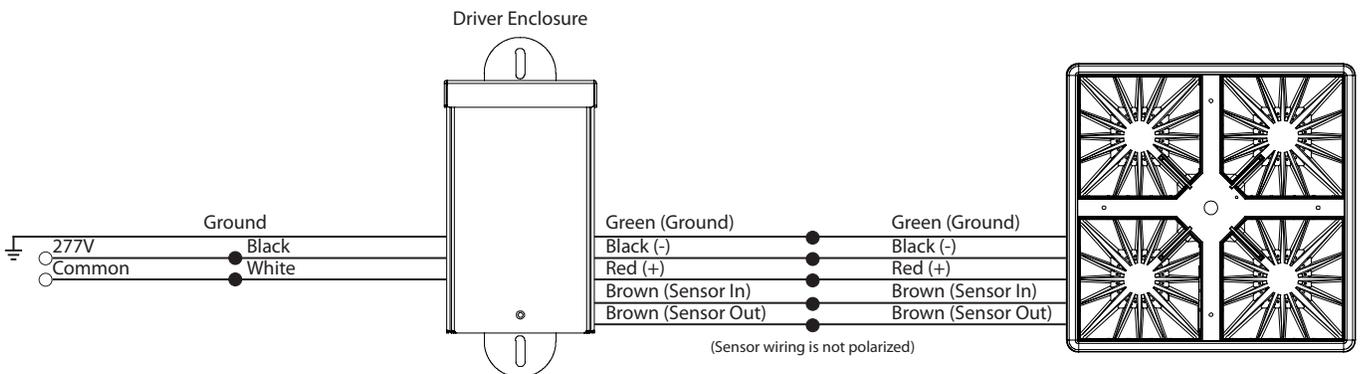

Note: Fixture must be installed by a licensed electrician. These instructions do not cover all details or variations in equipment, nor do they provide for every uncertainty related to installation, operation, maintenance, or mounting contingency. Should specific problems occur that are not covered sufficiently for the purchaser's purpose, contact Techlight for additional product or application information. Improper installation and/or utilization may void manufacturer's warranty.