

TECHLIGHT PK2, PK3, AND PK4 CONCRETE POUR KIT INSTALLATION INSTRUCTIONS

READ INSTRUCTIONS CAREFULLY AFTER UNDERSTANDING THE TDB INSTALLATION INSTRUCTIONS

THESE INSTRUCTIONS COVER MOST INSTALLATION APPLICATIONS. FOR ANY SPECIAL APPLICATIONS NOT COVERED, PLEASE CONTACT TECHLIGHT FOR ASSISTANCE.

1. TO ENSURE PROPER DRAINAGE, PREPARE THE GRAVEL FOUNDATION. THE HEIGHT OF THE CONCRETE POUR ACCESSORY IS 6" INCHES. BE CERTAIN THAT THE CONCRETE LEVEL WHEN POURED WILL BE FLUSH WITH THE TOP OF THE ACCESSORY.

2. POSITION FIXTURE HOUSING IN CONCRETE POUR ACCESSORY, MAKING SURE THAT THE UNDERSIDE OF THE HOUSING FLANGE RESTS ON TOP OF THE SET SCREWS. TIGHTEN SET SCREWS ON SIDE OF ACCESSORY TO LOCK HOUSING IN PLACE. SECURE ASSEMBLY TO FINAL LOCATION WITH RE-BAR AND OTHER ANCHORING DEVICES.

3. INSTALL CONDUIT INTO HOUSING, PULL WIRES OR ROUTE LOW VOLTAGE CABLE, AND FILL WIRE WAY WITH TWO PART TECHLIGHT GELPAK TO PREVENT WATER ENTRY FROM CONDUIT OR WIRE WAY.



4. INSTALL DIRT COVER TO THE HOUSING TO PREVENT CONCRETE SPLASHES FROM ENTERING FIXTURE WHEN POURING.

5. POUR CONCRETE. **REMEMBER FIXTURE POSITION CANNOT BE ALTERED AFTER POURING CONCRETE!!!!**

6. ONCE CONCRETE HAS SET AND IS COMPLETELY CURED, REMOVE DIRT COVER AND INSTALL ELECTRICAL COMPONENTS. INSTALL SPECIFIED LAMP AND REPLACE COVER.

7. CONNECT FIXTURE TO RATED VOLTAGE AND APPLY ENERGY.

POUR Kit 3

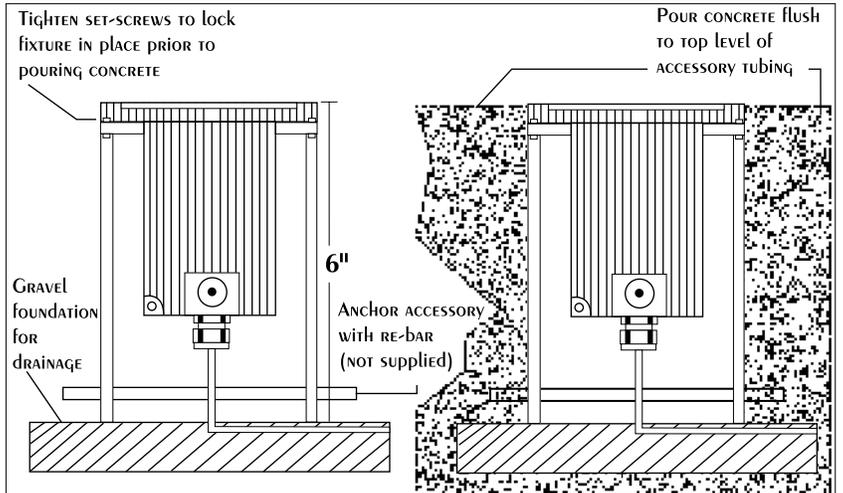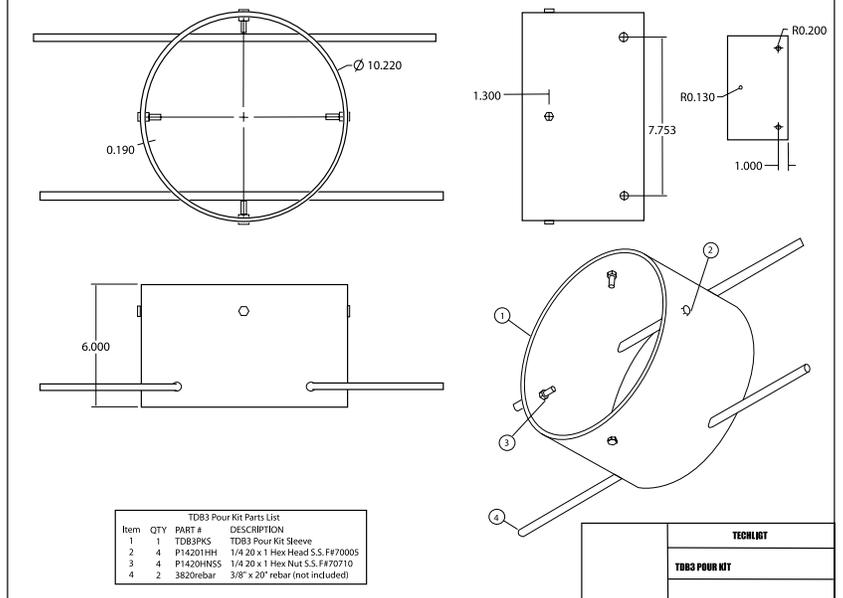

POUR Kit 4

