



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Heavy duty construction. Remote capable. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic construction.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, 10Ah, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


MOUNTING — Side and top conduit knockouts.

ILLUMINATION — Adjustable, glare-free PAR-Type lamp heads. 6V model offers 7.2W lamps, standard. 12V model offers 9W/12W lamps, standard.

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



Heavy Duty Emergency Light HD SERIES

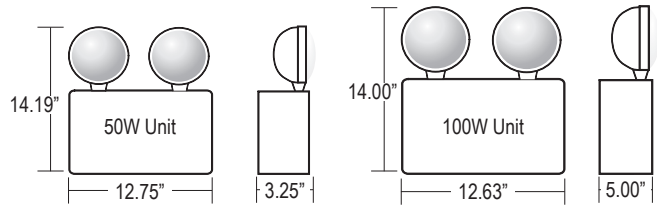

Series	Housing Height	Length & Width
HD	50W: 14.19", 100W: 14.00"	50W: 12.75" x 3.25", 100W: 12.63" x 5.00"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **HD12V10**

HD			
Series	Voltage	Capacity	Options
HD	6V 6 Volt 12V 12 Volt	5 50 Watt 10 100 Watt	SD Self Diagnostic HT Internal Heater SB12 12V 12W Sealed Beam Halogen SB20 12V 20W Sealed Beam Halogen NH No Heads