

## FEATURES & SPECIFICATIONS

**APPLICATION** — The SRF-BR Flood Light is a compact HID light ideal for site, display, landscape, and general security lighting. Designed specifically for lighting small trees with medium canopies. The brass housing makes this fixture ideal for harsh or coastal environments. A number of shielding options are available for customized effects.

**CONSTRUCTION** — The housing and door frame are constructed of die cast brass. The flat tempered glass lens is sealed in place and a door gasket is provided for weather tight protection. ETL listed for wet locations.

**FINISH** – A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

**ELECTRICAL SYSTEM** – Available in 50W thru 100W pulse-start metal halide, high pressure sodium and mercury vapor. Comes standard with a 4KV pulse rated medium base socket. Each 60HZ CWA Multi-Tap<sup>1</sup> or 480V ballast is pre-wired and installed for convenience.


**MOUNTING** – Standard mounting option available is a  $\frac{1}{2}$ " threaded knuckle mount. Additional mounting options may be available for custom applications.



**Brass Small Rectangular Flood** 

SRF-BR SERIES






Series	Housing Height	Length & Width 5" x 10"	
SRF-BR	6"		

Example: SRF-BRH-BZ

### ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

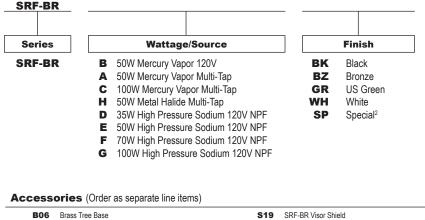

B06	Brass Tree Base	S19	SRF-BR Visor Shield
B03	4" Round 3 Hole Cover	<b>S85</b>	SRF-BR Copper Visor Shield
P4025D	2-3/8" OD Tenon Mount Adaptor	S62	SRF-BR 4 Sided Shield
TLSBBJB	Brass Junction Box	S88	SRF-BR Louvered Shield
	20" x 2.5" Mounting Stake (Brass)	S50	SRF-BR Vandal Shield
LMS <sup>3</sup>	20" x 2.5" Mounting Stake (SCH 40 PVC)	S51	SRF-BR Wire Guard
LMSZ-BK <sup>3</sup>	20" x 2.5" Mounting Stake (Zinc Top Painted Black)		
P1000PC	Button Type Photocell		

NOTES

- 1 Multi-Volt is 120/208/240/277V wired 277V
- 2 Custom RAL color matching is available. Contact your Techlight sale
- representative for additional information.
- 3 Line voltage bullets require LARGE stakes

#### www.techlightusa.com

# SRF-BR Brass Small Rectangular Flood

## **MOUNTING ACCESSORIES**



B06 Brass Tree Base



B03 4" Round 3 Hole Cover



TLSBBJB Brass Junction Box

LMSB, LMS, LMSZ-BK 20" x 2.5" Mounting Stakes



## ADDITIONAL FIXTURE ACCESSORIES

SRF-BR Visor Shield





SRF-BR Copper Visor Shield



SRF-BR 4 Sided Shield





S50 SRF-BR Vandal Shield



SRF-BR Wire Guard





Techlight, Inc. 2707 Satsuma Drive Dallas, TX, 75229 Phone: 214-350-0591, 800-225-0727, Fax: 214-350-9137 www.techlight.com