



|  |             |
|--|-------------|
| <b>Catalog Number</b><br>CEM _ - _ - _ - _ |             |
| <b>Notes</b>                               | <b>Type</b> |

## FEATURES & SPECIFICATIONS

### Applications

Ideal for parking garages and other covered settings.

### Construction

The Housing is a fabricated body constructed of extruded aluminum and welded seam to insure smooth construction. Mitered corners insure weather proof integrity. The door frame is constructed of extruded aluminum also with mitered corners.

### Finish

Durable polyester powder coat paint. Comes standard with white finish.

### Optical System

Fixture comes with flat glass or prismatic flat lens and Type V (5) full-spec aluminum reflector.

### Ballast

Metal halide and high pressure sodium ballasts available in a range of wattages listed below.


### Warranty

5 year warranty on the fixture and finish, one year on the ballast and 90 days on the lamps.

## MEDIUM EXTRUDED CANOPY



### DIMENSIONS

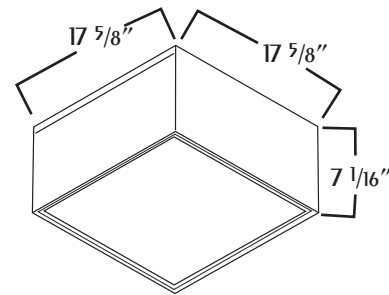

## ORDERING NOMENCLATURE

|                                   |   |  |                  |                                       |
|-----------------------------------|---|--|------------------|---------------------------------------|
| CEM                               | 50M   | -MT  | PS               | -F                                    |
| Series                            | Ballast/Lamp  | Voltage  | Pulse Start      | Lens                                  |
| CEM= Medium<br>Extruded<br>Canopy | 50M = 50W MH<br>70M = 70W MH<br>100M = 100W MH<br>150M = 150W MH<br>175M = 175W MH<br>} Vertical<br>Burn<br><br>250M = 250W MH<br>320M = 320W MH<br>400M = 400W MH<br>400H = 400W HPS<br>} Horizontal<br>Burn | MT = Multi-tap<br>480 = 480 volt<br>120 = 120 volt | PS = Pulse Start | F = Flat Glass<br>FP = Flat Prismatic |