


## LOW VOLTAGE ENCLOSURES

### ELV300 / ELV600

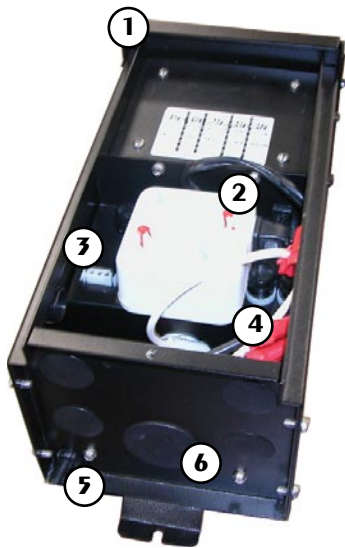

#### 1. HOUSING

ALUMINUM POWDER COATED HOUSING WITH REMOVEABLE DOOR.

#### 2. PLUG AND TIMER

STANDARD TRANSFORMER plug with optional TIMER availability.

#### 3. PHOTOCELL

OPTIONAL PHOTOCELL EQUIPPED WITH QUICK CONNECTS. AVAILABLE WITH UP TO 8 FEET OF EXTENSION CORD FOR REMOTE APPLICATIONS.

#### 4. WIRING

COLOR CODED SECONDARIES WITH SPECIFICALLY MARKED VOLTAGES.


#### 5. POWER CORD

STANDARD 6 FOOT 120 VOLT CORD.

#### 6. REMOVABLE BASE

REMOVABLE BASE FOR EASY INSTALLATION WITH 4 AVAILABLE 3/4" KNOCK OUT HOLES AND 1 LARGE 1 3/4" KNOCK OUT HOLE FOR WIRE CONDUITS.

## DIMENSIONS

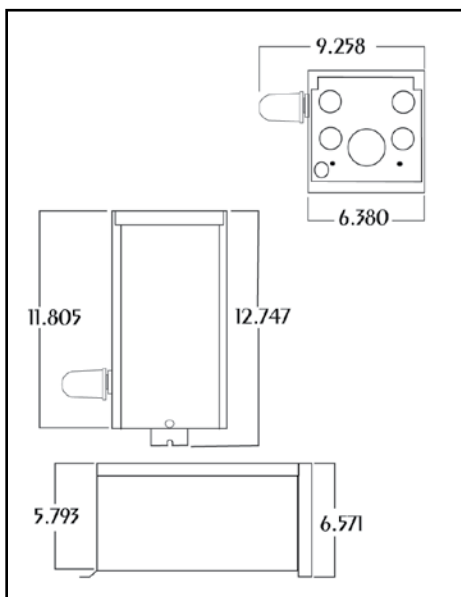

## ACCESSORIES



TLTN811C  
- TIMER



P2000PC-LVENC  
- PHOTOCELL



PCCORD-6  
PCCORD-8 -  
PHOTOCELL EXTENSION

## ORDER INFORMATION

### FIXTURE-

	CATALOG#	DESCRIPTION
ELV300	ELV300	300W 120V Low Voltage Enc
	ELV600	600W 120V Low Voltage Enc

EXAMPLE