


## LOW VOLTAGE ENCLOSURES

### LVSS300 / LVSS600

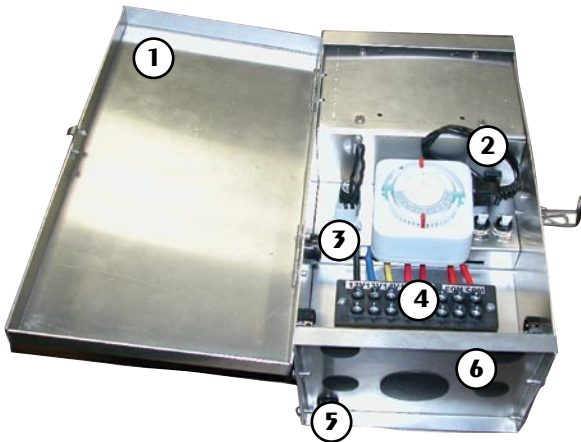

#### 1. HOUSING

STAINLESS STEEL HOUSING with double hinged door and stainless steel clip

#### 2. PLUG and TIMER

STANDARD TRANSFORMER plug with optional TIMER availability.

#### 3. PHOTOCELL

Optional photocell equipped with quick connects. Available with up to 8 feet of extension cord for remote applications.

#### 4. TERMINAL BLOCK

Low profile oversized Terminal Block capable of doing multiple strand leads. Each block is equipped with 5 voltage settings, (12V, 13V, 14V, 15V, & 24V) and 2 neutral comm ports.


#### 5. POWER CORD

STANDARD 6 foot 120 volt cord.

#### 6. REMOVABLE BASE

REMOVABLE BASE FOR EASY INSTALLATION with 4 available 3/4" knock out holes and 1 large 1 3/4" knock out hole for wire conduits.

## DIMENSIONS

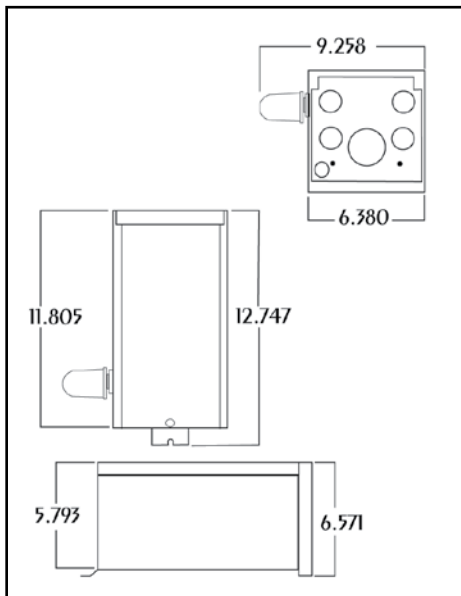

## ACCESSORIES



TLTN811C  
- Timer



P2000PC-LVENC  
- Photocell



PCCORD-6  
PCCORD-8 -  
PHOTOCELL EXTENSION

## ORDER INFORMATION

### FIXTURE-

	CATALOG#	DESCRIPTION
LVSS300	LVSS300	300W 120V STAINLESS STEEL ENC
	LVSS600	600W 120V STAINLESS STEEL ENC

EXAMPLE