

LOW VOLTAGE ENCLOSURES

LVSS900 / LVSS1200



1. HOUSING

STAINLESS STEEL HOUSING WITH DOUBLE HINGED DOOR AND STAINLESS STEEL CLIP

2. PLUG AND TIMER

STANDARD TRANSFORMER PLUG WITH OPTIONAL TIMER AVAILABILITY.

3. PHOTOCELL

OPTIONAL PHOTOCELL EQUIPPED WITH QUICK CONNECTS. AVAILABLE WITH UP TO 8 FEET OF EXTENSION CORD FOR REMOTE APPLICATIONS.

4. TERMINAL BLOCK


LOW PROFILE OVERSIZED TERMINAL BLOCK CAPABLE OF DOING MULTIPLE STRAND LEADS. EACH BLOCK IS EQUIPPED WITH 5 VOLTAGE SETTINGS, (12V, 13V, 14V, 15V, & 24V) AND 2 NEUTRAL COMM PORTS.

5. POWER CORD


STANDARD 6 FOOT 120 VOLT CORD.

6. REMOVABLE BASE

REMOVABLE BASE FOR EASY INSTALLATION WITH 4 AVAILABLE 3/4" KNOCK OUT HOLES AND 1 LARGE 1 3/4" KNOCK OUT HOLE FOR WIRE CONDUITS.

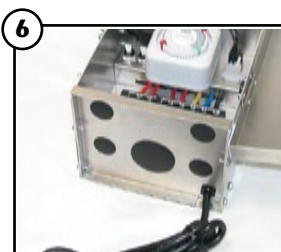

DIMENSIONS

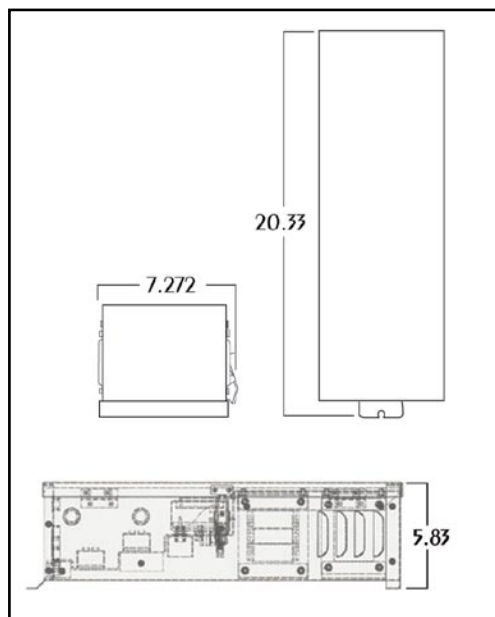

ACCESSORIES



TLTN811C
- TIMER



P2000PC-LVENC
- PHOTOCELL



PCCORD-6
PCCORD-8 -
PHOTOCELL EXTENSION

ORDER INFORMATION

FIXTURE-

	Catalog#	Description
LVSS900	LVSS900	900W 120V STAINLESS STEEL ENC
	LVSS1200	1200W 120V STAINLESS STEEL ENC