


WL SERIES

Mercury Vapor Well Light

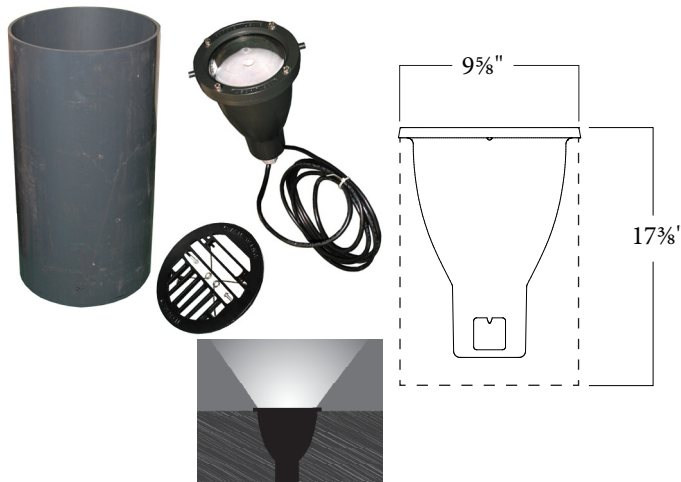

ORDERING INFORMATION

100W R40 MV, ALUM GRILL	WL (A)R4-(B)-1-1-1-1-2
100W R40 MV, BRASS GRILL	WL (A)R4-(B)-1-1-2-1-2
100W R40 MV, COMP GRILL	WL (A)R4-(B)-1-1-3-1-2
100W PAR38 MV, ALUM GRILL	WL (A)R4-(B)-1-1-1-3-2
100W PAR38 MV, BRASS GRILL	WL (A)R4-(B)-1-1-2-3-2
100W PAR38 MV, COMP GRILL	WL (A)R4-(B)-1-1-3-3-2
175W R40 MV, ALUM GRILL	WLAR4-(B)-1-1-1-4-4
175W R40 MV, BRASS GRILL	WLAR4-(B)-1-1-2-4-4
175W R40 MV, COMP GRILL	WLAR4-(B)-1-1-3-4-4

(A) Housing	(B) Cord
A - Aluminum	15 - 15'
B - Brass ¹	30 - 30'
Z - Zinc ¹	

(All fixtures listed include a medium aluminum remote ballast enclosure. See complete ordering information for addition options.)

DESIGN

The WL Series Well Light was designed as a low profile in-ground incandescent or remote ballasted HID well light. It can stand up to the corrosive forces of water, soil, and time. A Directional Safety Grill is available in multiple finishes for a pleasing look and simple light control.

ACCESSORIES



ALUMINUM GRILL
S29



BRASS GRILL
S30



COMPOSITE GRILL
(BLACK)
S54


TECHNICAL INFORMATION

Die cast aluminum housings are pre-wired, potted, and internally grounded. The fixture can be used with up to 175W R40 Mercury Vapor lamps. PVC Well Sleeve comes standard.

Notes: 1-100W max in both the brass and zinc housings.

WL SERIES

Metal Halide Well Light

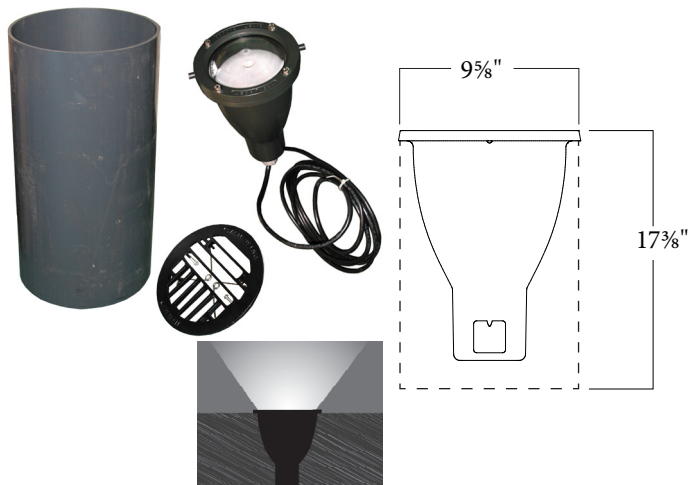

ORDERING INFORMATION

70W R40 FL MH, ALUM GRILL	WL (A)R4- (B)-1-1-1-6-5
70W R40 FL MH, BRASS GRILL	WL (A)R4- (B)-1-1-2-6-5
70W R40 FL MH, COMP GRILL	WL (A)R4- (B)-1-1-3-6-5
100W R40 FL MH, ALUM GRILL	WL (A)R4- (B)-1-1-1-8-6
100W R40 FL MH, BRASS GRILL	WL (A)R4- (B)-1-1-2-8-6
100W R40 FL MH, COMP GRILL	WL (A)R4- (B)-1-1-3-8-6
175W R40 SP MH, ALUM GRILL	WLAR4- (B)-1-1-1-11-7
175W R40 SP MH, BRASS GRILL	WLAR4- (B)-1-1-2-11-7
175W R40 SP MH, COMP GRILL	WLAR4- (B)-1-1-3-11-7
175W R40 FL MH, ALUM GRILL	WLAR4- (B)-1-1-1-10-7
175W R40 FL MH, BRASS GRILL	WLAR4- (B)-1-1-2-10-7
175W R40 FL MH, COMP GRILL	WLAR4- (B)-1-1-3-10-7

(A) Housing	(B) Cord
A - Aluminum ¹⁵	15 - 15'
B - Brass ¹	30 - 30'
Z - Zinc ¹	

(All fixtures listed include a medium aluminum remote ballast enclosure. See complete ordering information for addition options.)

DESIGN

The WLAR Well Light was designed as a low profile in-ground incandescent or remote ballasted HID well light. It can stand up to the corrosive forces of water, soil, and time. A Directional Safety Grill is available in multiple finishes for a pleasing look and simple light control.

ACCESSORIES



ALUMINUM GRILL
S29



BRASS GRILL
S30



COMPOSITE GRILL
(BLACK)
S54


TECHNICAL INFORMATION

Die cast aluminum housings are pre-wired, potted, and internally grounded. The fixture can be used with up to 175W R40 Metal Halide lamps. PVC Well Sleeve comes standard.

Notes: 1-100W max in both the brass and zinc housings.

WL SERIES

Incandescent Well Light

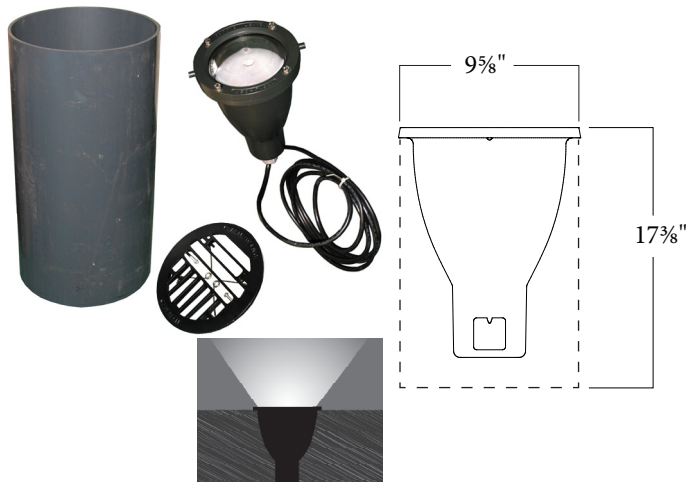

DESIGN

The WLAR Well Light was designed as a low profile in-ground incandescent or remote ballasted HID well light. It can stand up to the corrosive forces of water, soil, and time. A Directional Safety Grill is available in multiple finishes for a pleasing look and simple light control.

ACCESSORIES



ALUMINUM GRILL
S29



BRASS GRILL
S30



COMPOSITE GRILL
(BLACK)
S54

ORDERING INFORMATION

ALUM HSG, 15' CORD, ALUM GRILL WLAR4-15-11

ALUM HSG, 30' CORD, ALUM GRILL WLAR4-30-11

BRASS HSG, 15' CORD, ALUM GRILL WLBR40-15/BR-12¹

BRASS HSG, 30' CORD, ALUM GRILL WLBR40-30/BR-12¹

ZINC HSG, 15' CORD, ALUM GRILL WLZR4-15-11¹

ZINC HSG, 30' CORD, ALUM GRILL WLZR4-30-11¹

TECHNICAL INFORMATION

Die cast housings are pre-wired, potted, and internally grounded. The fixture can be used with up to 150W PAR38 Incandescent lamps. PVC Well Sleeve comes standard.

Notes: 1-100W max in both the brass and zinc housings.