



Catalog Number	
Project	Type

Features & Specifications

Construction

The housing and door frame are constructed of die cast aluminum. The flat tempered glass lens is sealed in place and a door gasket is provided for weather tight protection. ETL listed for wet locations.

Optical System

The vertical lamp placement allows for a wider distribution and more easily controlled light patterns.

Electrical System

Available in 50W thru 175W standard metal halide, pulse-start metal halide, high pressure sodium, and mercury vapor. Comes standard with a 4KV pulse rated medium base socket. Each 60HZ CWA multi-tap, 480V, or 120V NPF (HPS Only) ballast is pre-wired and installed for convenience.

Mounting

Standard mounting options include 1/2" adjustable knuckle fitter. Additional mounting options such as a 2" adjustable knuckle are available.


Finish

A Super Durable Polyester powder coat finish is electrostatically applied. Standard colors available: Black, Bronze, White, OD Green, US Green. Custom colors available upon request.

SSF SERIES SMALL SQUARE FLOOD FIXTURE



DIMENSIONS

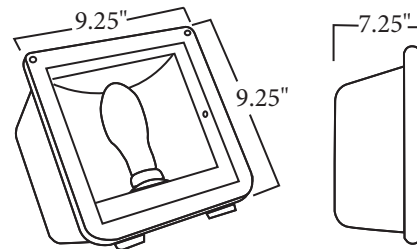

Est Shipping Weight: 22 lbs



Please contact your Techlight Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Small Square Flood, 100W Pulse-Start Metal Halide, Multi-Tap, Bronze = SSFB4A-BZ)

SSF			
-----	--	--	--

SERIES	WATTAGE	VOLTAGE	FINISH
SSF Small Square Flood	B2 - 50W PSMH B3 - 70W PSMH B4 - 100W PSMH B5 - 175W MH B6 - 70W HPS B7 - 100W HPS B8 - 150W HPS B10 - 100W MV B11 - 175W MV B12 - 150W PSMH	A - Multi-Tap ¹ B - 480V C-R - 120V NPF ² <small>1-Multi-Tap is 120/208/240/277V 2-120V NPF available in HPS models only</small>	BK - Black BZ - Bronze GR - OD Green WH - White USG- US Green SP - Special