



Catalog Number	
Project	Type

Features & Specifications

Application

Low profile, single light fluorescent wraparound is a perfect complement fixture for corridors, stairwells, small office areas, commercial spaces, dormitories, and utility lighting.

Features

Lift and shift refractor for ease of maintenance and re-lamping. Complies with federal energy efficiency standards. Wire way cover easily removed without tools. Surface or stem mounting, single or continuous row. Wall mount application possible.

Construction

Low glare, extruded acrylic refractor with a heavy gauge end plate with embossed light seal for dependable performance and great aesthetic appeal.


Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

SW SERIES SINGLE WRAP

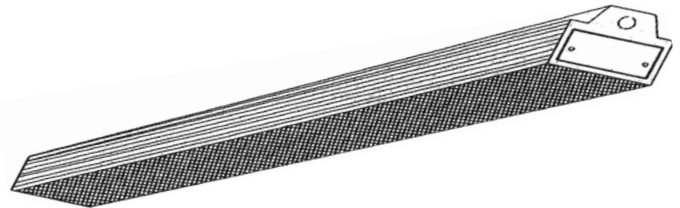

DIMENSIONS

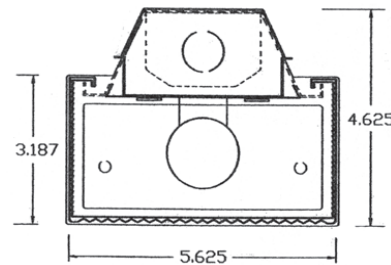

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Single Wrap, 1 Lamp, 32W T8, 4', Multi-Volt = SW132D)

--	--	--	--	--	--


SERIES	NUMBER OF LAMPS	WATTAGE	VOLTAGE	BALLAST FACTOR	OPTIONS
SW For tandem double-length unit, add suffix T Ex: SWT	1 (Per cross section)	14 - 14W T5, 22" 17 - 17W T8, 24" 25 - 25W T8, 36" 28T5 - 28W T5, 46" 28T8 - 28W T8, 48" 32 - 32W T8, 48" 48HO - 60W 800mA, 48" 54 - 54W T5HO, 46"	D - Multi-Volt 1 - 120V 2 - 277V 3 - 347V 4 - 480V *Multi-Volt is 120/277V	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start P - Program Start 20 - ≤20% THD EB5 - 500 Lumen Emergency Ballast EB7 - 700 Lumen Emergency Ballast EB14 - 1400 Lumen Emergency Ballast EB30 - 3000 Lumen Emergency Ballast FBF - Fast-Blow Fuse SBF - Slow-Blow Fuse AF6 - 6', 3/8" dia., Armored Flex Cable SJ6 - 6', 3/8" dia., 16/3 SJ Cord SJ10 - 10', 3/8" dia., 16/3 SJ Cord PWO - Palletized without Cartons CD - Continuous Dimming (T8) SD - Step Dimming (T8) CD5 - Continuous Dimming (T5) SD5 - Step Dimming (T5) WOC - 120/277 Volt Sensor WOC1 - 347/480 Volt Sensor C1 - 6' Cord w/120V Nema Plug 16/3 15A C2 - 6' Cord w/277V Nema Plug 16/3 15A C3 - 10' Cord w/277V Nema Plug 16/3 20A C4 - 6' Cord w/480V Nema Plug 16/3 15A WH34- Wiring Harness 3-Wire 4-Foot WH44- Wiring Harness 4-Wire 4-Foot WH54- Wiring Harness 5-Wire 4-Foot

ADDITIONAL OPTIONS

WHC - (3)S Hooks and 36" Chain Set	G15 - 15' Aircraft Cable w/ 12" Arms
THE - Tong Hanger, End Mount	
THS - Tong Hanger, Side Mount	
G10 - 10' Aircraft Cable w/ 12" Arms	
G12 - 12' Aircraft Cable w/ 12" Arms	

Energy Saving Tip!
Our Occupancy Sensor
option instantly turns
lights on and off

POLAR GRAPH

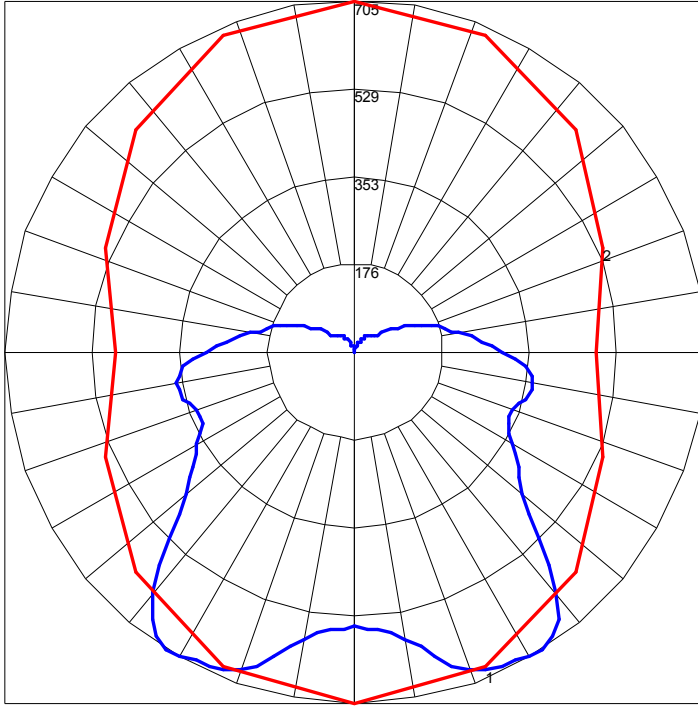

Maximum Candela = 705 Located At Horizontal Angle = 90, Vertical Angle = 32.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (32.5) (Through Max. Cd.)