



| | |
|----------------|------|
| Catalog Number | |
| Project | Type |


FEATURES & SPECIFICATIONS

CONSTRUCTION — The housing is made of compression molded fiber reinforced polyester composite. The color impregnated SR2 composite will not flake or peel. Multiple ring/guard assemblies are available for a customizable trim finish.

OPTICAL SYSTEM — The fixture can accommodate reflector shaped lamps for specific beam patterns. Convex and walk over lenses are both available.

ELECTRICAL SYSTEM — The fixture can be used with PAR20, PAR30, and PAR38 LED lamps. Pre-installed 15' and 30' power cords are available from the factory.

MOUNTING — The TDB3W Well Light is an in-ground fixture and should be installed with back fill according to the Techlight TDB installation instructions. A 3/4" conduit entry is supplied into the anti-siphon chamber of the housing.

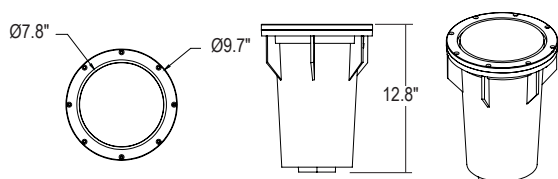

| Series | Housing Height | Outside Diameter |
|--------------|----------------|------------------|
| TDB3W | 12.8" | 7.8" |

Medium LED Burial Light TDB3W SERIES



ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: TDB3W PAR NB CR CL 120V C15

| TDB3W | | | | | | |
|--------------|--|---|---|---|------------------|--|
| Series | Reflector | Source | Ring/Guard | Lens | Voltage | Options |
| TDB3W | PAR¹ None - prepped for PAR20, PAR30, PAR38 and R style LED lamps (lamps ordered separately) | NB No Ballast Needed - LED Lamp being purchased separately | CR Composite Ring SR Stainless Steel Ring CG Composite Guard | FL Flat Lens CL Convex Lens SL Slip Resistant Lens | 120V 120V | C15 15' Cord C30 30' Cord |

Accessories (Order as separate line items)

| | |
|----------------|------------------------|
| PK3 | Concrete Pour Kit |
| TDB3AFD | Anti-floatation Device |
| TDB3GG | Internal Louver |
| TDB3IL | Directional Louver |

LAMPS

| | |
|-----------------------------------|--|
| LUVMR4025Wxx³ | LED 25W Retrofit Module w/isolated driver |
| LUVMR4032Wxx³ | LED 32W Retrofit Module w/isolated driver |
| LUVMR40xxWCMVS⁴ | Clear Mercury Vapor Spectrum LED Retrofit Module w/isolated driver |

NOTES

- 1 PAR option must be ordered for all PAR20, PAR30, PAR38 and R reflectorized LED lamping
- 2 Recommend minimum one surge protection device for each circuit. See [FSPENCA277V](#) Series specification sheet for details.
- 3 XX could be **GR** = Green, **65** = 6500K. See [LUVM Series](#) specification sheet for details.
- 4 XX could be **25, 27, 30, 32, 34, 36, 39,** or **42** watts. See [LUVM CMVS](#) specification sheet for details.



TDB3W Medium HID/Incandescent Burial Light

FIXTURE OPTIONS

TDB3-RG-COM
Composite Ring




TDB3-GRD-COM
Composite Rock Guard



TDB3-RG-SS
Stainless Steel Ring



TDB3-GK-WO
Flat Lens



TDB3-GK-CON
Convex Lens



TDB3W-GK-EG
Slip Resistant Lens



ADDITIONAL FIXTURE ACCESSORIES

PK3
Concrete Pour Kit



TDB3AFD
Anti-floatation Device



TDB3GG
Internal Louver



TDB3IL
Directional Louver



Techlight, Inc.
2707 Satsuma Drive
Dallas, TX, 75229
Phone: 214-350-0591, 800-225-0727, Fax: 214-350-9137
www.techlight.com