



Catalog Number	
Project	Type

20' Steel 3" Square 11 Gauge Pole

SSP SERIES



POLE — The pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 50,000 PSI and conforms to ASTM A500 grade C requirements. The shaft construction is a single piece of formed steel welded longitudinally. The hand hole is located 1' above the pole base. A ground lug is provided standard.

ANCHOR BASE — The anchor base is fabricated from a structural quality hot rolled carbon steel plate that has a minimum yield strength of 36,000 PSI. The anchor base telescopes the pole shaft and has a circumferential weld on the top and bottom.

BASE COVER – A full base cover is provided which encapsulates the base plate and anchor bolts to provide a clean transition from pier to pole.



FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request. Galvanizing treatments available upon request. Additional warranty extensions available with these treatments.

Nominal Pole Height	20'-0"
Shaft Dimensions	20' x 3"
Wall Gauge	11 Gauge
Bolt Circle	7.5"
Bolt Size	3/4" x 18" x 3"
Base Plate Dimensions	7.5" sq. x .75" thk.
Est. Shipping Weight	143 lbs



90 mph	4.2
100 mph	2.8
110 mph	1.8
120 mph	0.9
130 mph	0.3
140 mph	n/a

Mounting Options



Drilling Locations

Sides	A	B	C	D
Hand Hole	X			
DM1	X			
DM290	X	X		
DM2180		X		X
DM390	X	X		X
DM490	X	X	X	X

ORDERING INFORMATION

Choose the bold face options for the appropriate pole configuration for your application and enter on the line above each pole attribute. Accessories may be factory installed, depending on the particular accessory chosen, but must still be ordered as a separate line item.

Example: **SSP 20 3 11 BZ T238**

SSP

Series	Pole Height	Pole Size	Pole Gauge	Color	Mounting	Drill Pattern
SSP	20 20' Nominal	3 3" Square	11 11 Gauge	BK Black	DM1 Drill One Side	Blank None - for Tenon
				BZ Bronze	DM290 Drill 2 Sides at 90°	Mounting
				WH White	DM2180 Drill 2 Sides at 180°	SSA SSA Drill Mount
				GR US Green	DM390 Drill 3 Sides at 90°	Pattern
				GLV Galvanized	DM490 Drill 4 Sides at 90°	VSA VSA Drill Mount
				GLVP¹ Galvanized and Painted	T238 2-3/8" OD Tenon (Standard)	Pattern
				SP Special	T278 2-7/8" OD Tenon	
					ND No Drilling	

NOTE: ANCHOR BOLT KITS MUST BE ORDERED AS A SEPARATE LINE ITEM. EACH KIT IS PROVIDED WITH A RIGID TEMPLATE FOR INSTALLATION. SEE ACCESSORIES FOR KIT PART NUMBERS. PLEASE NOTE ON PURCHASE

NOTE: ANCHOR BOLT KITS MUST BE ORDERED AS A SEPARATE LINE ITEM. EACH KIT IS PROVIDED WITH A RIGID TEMPLATE FOR INSTALLATION. SEE ACCESSORIES FOR KIT PART NUMBERS. PLEASE NOTE ON PURCHASE ORDER IF ANCHOR BOLTS AND TEMPLATES ARE TO BE PRE-SHIPPED.

Options

(Include in Pole Ordering String Above)

TLGFIA Ground Fault Receptacle
PHH² Additional Hand Hole
AVD20³ Poles Anti Vibration Device

Accessories

(Order as separate line items)

KAB3418G75R AB Kit (4) 3/4" x 18" Galvanized Bolts and Rigid Template
KAB3418G75RUSA⁴ USA Anchor Bolt Kit part for the Anchor Bolts+Template



NOTES

- 1 For 'Galvanized and Painted' option. You must specify a paint color code as the suffix in addition to the GLVP coating option. (Example: GLVPBZ).
- 2 Please note location for additional hand hole when ordering. See Drilling Locations diagram for location designations.
- 3 See Page 2 for details
- 4 **BABA Compliant:** All of the iron, steel, manufactured products, and construction materials used are produced in the United States.

Techlight
2707 Satsuma Drive, Dallas, TX 75229
PH: 214.350.0591 EMAIL: Techlight@techlight.com

www.techlight.com

****All dimensions and specifications are subject to change without notice.****


REV: 20250404-03

SSP SERIES 20' Steel 3" Square 11 Gauge Pole


Accessories (Order as separate line items)

AVD20 - Anti vibration device for 20ft pole

PN#	Pole Height(ft)	CHAIN LENGTH (ft)
AVD20	20	13

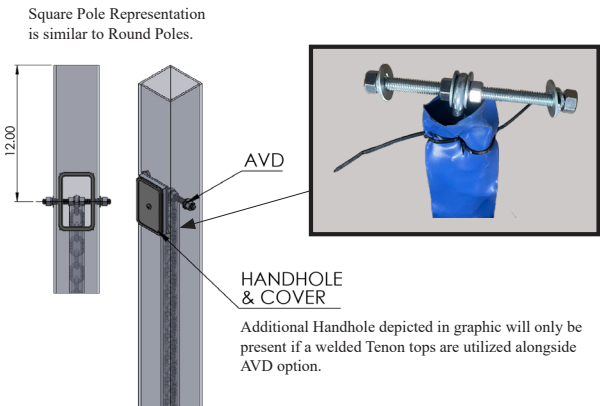

TL-GFIA - Ground Fault Receptacle

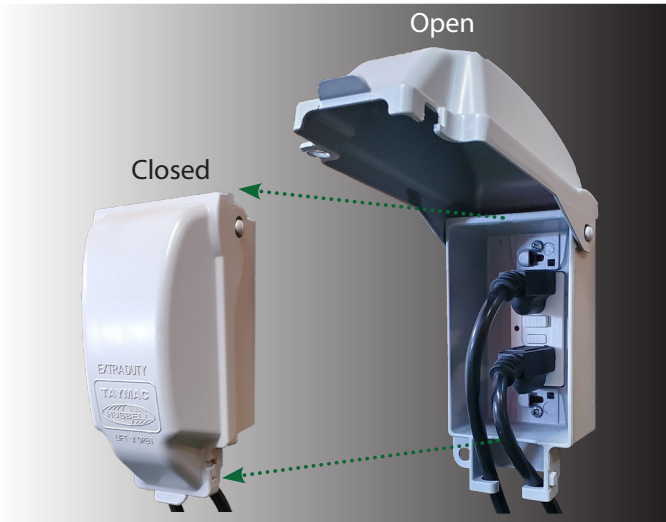

The GFIA (Ground Fault Circuit Interrupter) comes with a die cast aluminum in-use cover.

For Refrence Only: The ASCE 7 Hazard Tool is the official source of information for pole selection when identifying wind speed zone limits within North America.

<https://ascehazardtool.org/>