TECHLIGHT®
INNOVATOR AND LEADER IN THE LIGHTING INDUSTRY

R3LWC-P36 SERIES

PAR36 LED 14W Statue Spot

Catalog Number	
Project	Type

SERIES	HOUSING HEIGHT	LENGTH & WIDTH
R3LWC	7.0”	5.3” x 4.4”

FEATURES & SPECIFICATIONS

CONSTRUCTION — Made with a spun copper housing with stainless steel fasteners and die cast brass 1/2” Stem mount. Designed to efficiently operate PAR36 LED 14W lamps. A high temperature drain plug is provided for uplight applications. Internal driver is ETL listed for wet locations (IP67). Meets US and Canadian safety standards. -40°C to 40°C ambient operation.

FINISH — Super Durable Polyester Powder Coat finish are available in standard colors: Natural Copper, Black, Bronze, White, OD Green. Custom colors available upon request.

OPTICAL SYSTEM — 15°, 24°, 60°, and 120° optics available in 90CRI 3000K. Standard shields include an up shield, downlight shield and tube statue spot shield.

ELECTRICAL SYSTEM — Fixture operates at 120V input with electronic stepdown transformer (IP67 rated) and SPD (surge protection device) inside the bullet.

MOUNTING — Comes standard with a 1/2” threaded knuckle mount, fully adjustable swivel arm, and locking teeth. See available mounting accessories below.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

R3LWC-P36

SERIES	LED	SHIELD	BEAM	VOLTAGE	FINISH[1]
	14W	**S24** = Down Shield **S25** = Up Shield **S148** = Tube Shield	**15** = 15° **24** = 24° **60** = 60° **120** = 120°	**1** = 120V	**Blank** = Natural Copper **BZ** = Bronze **BK** = Black **ODG** = OD Green **WH** = White **SP** = Special

EXAMPLE:

R3LWC-P36-14W-S24-15-1-BK

AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only.
Mounting options must be ordered separately.



NOTES

1 = Additional charge for standard finishes, see Price Guide for details. Special finishes or custom RAL color matching are available. Contact your sales representative for additional info and a quote.

MOUNTING ACCESSORIES (Order as separate line items)

B01GL
Tree Base with Ground Lug

B02
1/2” Conduit Base

B03
4” Round 3 Hole Cover

B06
Brass Tree Base

B10
1/2” Hub with Ground

LMSB
20” x 2.5” Mounting Stake w/ Brass Caps

TLSBBJB
Brass Junction Box

B16-12
Palm Tree Base with 12’ Strap

LAMPS (For replacement lamp ordering only.)

103135	LMP LED 14 PAR36 15D 30K 90CRI
103139	LMP LED 14 PAR36 24D 30K 90CRI
103140	LMP LED 14 PAR36 60D 30K 90CRI
103136	LMP LED 14 PAR36 120D 30K 90CR

SHIELDS DIMENSIONS

S24
Down Shield

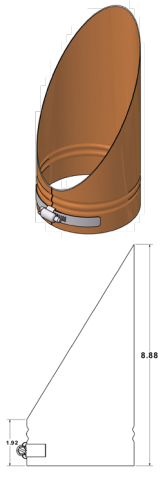

S25
Up Shield

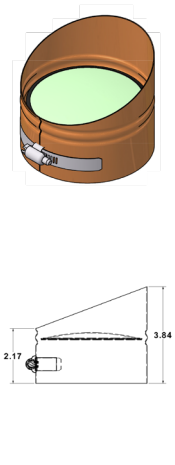

S148
Tube Statue Spot Shield

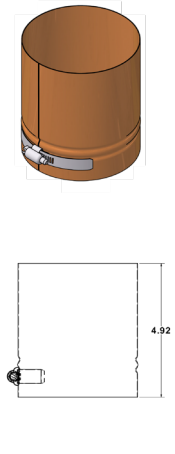

www.techlight.com

R3LWC-P36 PAR36 LED 14W Statue Spot

BEAM/LAMP SPREADS AND TECHNICAL DATA

CANDELA DISTRIBUTION

LUMINOUS INTENSITY

PN#: 103135

15 °/ Par36 / 14.0W

Beam Angle	15 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,020 Lumens
CCT	3000K
Lumens/Watt	73
CBCP	8897

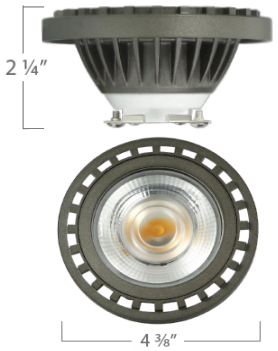

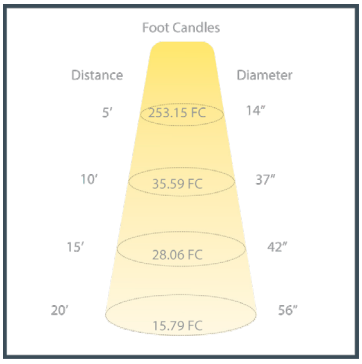

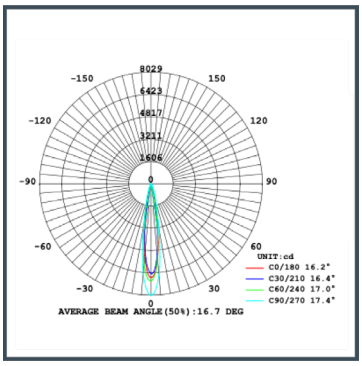

PN#: 103139

24 °/ Par36 / 14.0W

Beam Angle	24 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,100 Lumens
CCT	3000K
Lumens/Watt	79
CBCP	3086





PN#: 103140

60 °/ Par36 / 14.0W

Beam Angle	60 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,150 Lumens
CCT	3000K
Lumens/Watt	82
CBCP	1234

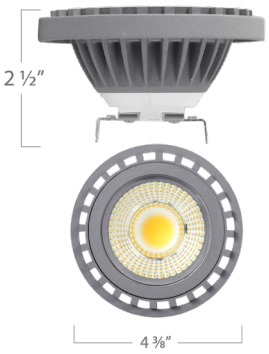





PN#: 103136

120 °/ Par36 / 14.0W

Beam Angle	120 Degrees
Wattage	14.0 W
CRI	90
Brightness	925 Lumens
CCT	3000K
Lumens/Watt	66
CBCP	415





WARNING: Maintenance performed including the replacement of LED lamps while power is still supplied to the luminaire may result in system failures and will void the warranty.

TECHLIGHT
INNOVATION IN ILLUMINATION
2009 Mckenzie Drive Suite 110 I Carrollton, TX 75006 I PH: 800.225.0727 www.techlight.com

All dimensions and specifications are subject to change without notice.