



Catalog Number	
Project	Type

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms, utility/area, and task lighting.

Features

Optimized for T8 lamp performance. Up-light slots are provided with ribbed white acrylic inlays. To direct illumination up or down, a lamp divider may be ordered separately. Independant switching capabilities may also be provided to individually control directional illumination.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with a smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Comes standard with ballast disconnects for safe maintenance.

Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.



WV337 SERIES WALL / VANITY 337



Top Up Light



DIMENSIONS

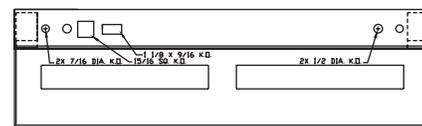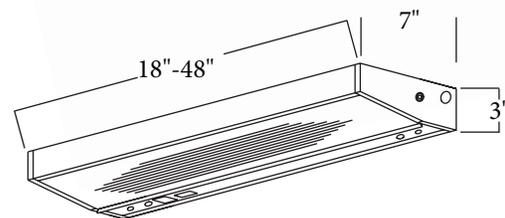

Top Up Light



Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 337, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV33713248SWD)

--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	DIFFUSER	VOLTAGE	BALLAST FACTOR	OPTIONS
WV337	1	15 - 15 watt T8 (18")	18 - 18"	SW - Smooth White	D - Multi-Volt	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start
	2	17 - 17 watt T8 (24")	24 - 24"	CP - Clear Prismatic	1 - 120V		P - Program Start
		25 - 25 watt T8 (36")	36 - 36"		2 - 277V		20 - ≤20% THD
		32 - 32 watt T8 (48")	48 - 48"	3 - 347V	EB5 - 500 Lumen Emergency Ballast		
		28T8 - 28 watt T8 (48")		4 - 480V	EB7 - 700 Lumen Emergency Ballast		
	*CFL - SPECIAL ORDER				*Multi-Volt is 120/277V	EB14 - 1400 Lumen Emergency Ballast	
						EB30 - 3000 Lumen Emergency Ballast	
						FBF - Fast-Blow Fuse	
						SBF - Slow-Blow Fuse	
						PC - Pull Chain	
						RS - Rocker Switch	
						CO - Convenience Outlet	
						IS2 - 2 Lamp Independant Switching	
						D337 - Lamp Divider for Independant Switching Option	