



Genesis Gen2 Large Low Voltage LED Landscape Bullet

Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The Genesis Gen2 line of LED Landscape Bullets are the most versatile LED fixtures on the market today. Various beam spreads and wattages allow for a customized finish to any property. The high end residential grade system was designed for low voltage operation residential applications

CONSTRUCTION — The die cast aluminum heat sink has 24 heat dissipating fins to maintain a cool operating LED for maximum life. The fins are independently supported to allow for unobstructed airflow. The fixture is designed to efficiently perform in any mounting orientation.

FINISH — A cathodic epoxy electrocoat primer or E-Coat is applied to all die cast aluminum components. E-coating provides the ultimate in corrosion and chemical resistance, providing superior salt spray, humidity and cyclic corrosion endurance. After the E-Coat is applied a super durable polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, OD Green, White. Custom colors available upon request.

OPTICAL SYSTEM — Techlight's proprietary OpticapSystem™ utilizes factory installed optical lenses & reflectors to increase fixture lumen output efficiency. The system is provided with a high performance convex lenticular prismatic flood or a plano-convex spot optical lens. The flood & spot optical lenses are molded from low iron tempered glass. A 96% reflective UV stabilized injection molded reflector is included with each system. The OpticapSystem shields are designed for optimum glare control in up or downlighting positions. A variety of glass color filters are available to meet the designers specific color control needs.

ELECTRICAL SYSTEM — NOTE: A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty. Fixture operates at 9-16VAC or 9-24VDC input voltage. A 36 or 56 watt LED source provides approximately 1831 to 2988 (CW) Lumens of light.

Patent: D0648056



Fixture shown with
SGL2DN60 Down Shield

SERIES	HOUSING HEIGHT	LENGTH & WIDTH
GL2	4.8"	7" x 4.3"

MOUNTING — The die cast aluminum mount is secured to the heat sink by stainless steel screws and is sealed with an integral o-ring. A 1/2" threaded knuckle is provided standard.

LISTINGS — ETL listed for wet locations (IP67). Meets US and Canadian safety standards. -40°C to 40°C ambient operation.

WARRANTY — Techlight warrants the LED lighting Product(s) to be free from defects in material and workmanship for a period of three years for LED Light Engines and LED Power Components, from the date of shipment. Ground mounted products that are provided standard with our proprietary E-Coat pretreatment prior to the application of a powdercoat finish will carry a full 10 year finish warranty. Proper maintenance is required for full finish warranty.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:

GL2 FL 36 NW LV ODG

GL2					
SERIES	DISTRIBUTION	WATTAGE	COLOR TEMP	VOLTAGE	FINISH
	FL = Flood (72°) SP = Spot (20°)	36 = 36W 56 = 56W	CW = Cool White (5900K) NW = Neutral White (4000K) WW ³ = Warm White (3000K) CRI >80	LV = 9-16VAC = 9-24VDC	BZ = Bronze BK = Black ODG = OD Green WH = White SP = Special ¹

ACCESSORIES

(Order as separate line items)

SGL2DN60	Downlight Shield
SGL2UP30	Uplight Shield
SGL2TUBE	Tube Shield
102552²	120-277V 10kV Surge Protector
B01GL	Tree Base with Ground Lug
B02	1/2" Conduit Base
B03	4" Round 3 Hole Cover
SMSB	12" x 1" Mounting Stake (Brass)
MMSB	18" x 1" Mounting Stake (Brass)
LMSB	20" x 2.5" Mounting Stake (Brass)
LMS	20" x 2.5" Mounting Stake (SCH 40 PVC)
LMSZ-BK	20" x 2.5" Mounting Stake (Zinc Top Painted Black)
LEDLFG120LENS	Green Glass Lens Filter (each)
LEDLB120LENS	Blue Glass Lens Filter (each)
TLHB800RCH	Digital Timer

ACCESSORIES

(Order as separate line items)

PW122LV	12-2 Low Voltage Wire
PW102LV	10-2 Low Voltage Wire
P20000PC-LVENC	Photocell (DC Transformer Operation Only)
PCCORD-6	6' Photocell Extension Cord
PCCORD-8	8' Photocell Extension Cord
PSJ163	16 Gauge 3 Strand Lead Wire
TLTN11	Mechanical Timer
B16-12	Palm Tree Base with 12' Strap
TLSBBJB	Brass Junction Box


NOTES

- 1 = Custom RAL color matching is available. Contact your sales representative for additional info.
- 2 = A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty.
- 3 = For Warm White options Consult Factory for availability.



AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Mounting options must be ordered separately.

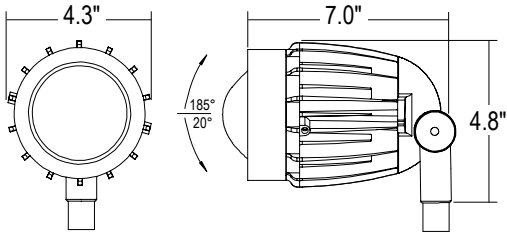

MOUNTING ACCESSORIES

B01GL Tree Base with Ground Lug 	B02 1/2" Conduit Base 	B03 4" Round 3 Hole Cover 	GEPTBZ Low Profile Tree Base 
B16-12 Palm Tree Base with 12' Strap 	TLSBBJB Brass Junction Box 	SMSB, MMSB 12" x 1" Mounting Stake (Brass) 18" x 1" Mounting Stake (Brass) LMSB, LMS, LMSZ-BK 20" x 2.5" Mounting Stake (Brass) 20" x 2.5" Mounting Stake (SCH 40 PVC) 20" x 2.5" Mounting Stake (Zinc Top Painted Black) 	

ADDITIONAL FIXTURE OPTIONS & ACCESSORIES

*** OPTION ***
GL2CAPCVXFLDREFL (Factory Installed)
72° Flood OpticapSystem™
Field Installable Flood Optic



*** OPTION ***
GL2CAPSPOPTREFL (Factory Installed)
20° Spot OpticapSystem™
Field Installable Spot Optic



102552
10kV Surge Protector



P20000PC-LVENC
Photocell (DC Transformer Operation Only)



PCCORD-6 6' Photocell Extension Cord
PCCORD-8 8' Photocell Extension Cord



TLHB800RCH
Digital Timer



PW122LV 12-2 Low Voltage Wire
PW102LV 10-2 Low Voltage Wire




PSJ163
16 Gauge 3 Strand Lead Wire



LEDLFG120LENS
Green Glass Lens Filter (each)



LEDLB120LENS
Blue Glass Lens Filter (each)





TLTN11
Mechanical Timer





SHIELDS


SGL2DN60
Downlight Shield



SGL2UP30
Uplight Shield



SGL2TUBE
Tube Shield




TRANSFORMERS



ELV300 300W AC Low Voltage Enclosure
ELV600 600W AC Low Voltage Enclosure
ELV900 900W AC Low Voltage Enclosure
ELV1200 1200W AC Low Voltage Enclosure

ELV300 thru ELV1200 are 120VAC-11-15VAC magnetic stepdown transformers. They have 11, 12, 13, 14, 15VAC outputs. The 600W, 900W, & 1200W units have 2ea, 3ea, & 4ea 300W rated output circuits respectively. They are enclosed in a aluminum NEMA raintight enclosure polyester powder coated BK finish.



LVSS300 300W SS AC Low Voltage Enclosure
LVSS600 600W SS AC Low Voltage Enclosure
LVSS900 900W SS AC Low Voltage Enclosure
LVSS1200 1200W SS AC Low Voltage Enclosure

LVSS300 THRU LVSS1200 are 120VAC-11-15VAC magnetic stepdown transformers. They have 11, 12, 13, 14, 15VAC outputs. The 600W, 900W, & 1200W units have 2ea, 3ea, & 4ea 300W rated output circuits respectively. They are enclosed in a stainless steel NEMA raintight enclosure, with natural finish.



ELV300MV24DCSS
 300W DC Transformer in a Stainless Steel Enclosure

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Power Factor	
					110Vac	220Vac
24 Vdc	90 ~ 305 Vac	0 ~ 12.5 A	300W	91%	.99	.96



ELV500MV24DCSS
 500W DC Transformer in a Stainless Steel Enclosure

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Power Factor	
					110Vac	220Vac
24 Vdc	175 ~ 305 Vac	0 ~ 20.83 A	500 W	94%	.99	.96


The **ELV150MV24DCSS** thru **ELV500MV24DCSS** are 120-277VAC – 24VDC electronic power supplies. They are equipped with surge protection, and are enclosed in a stainless steel NEMA raintight enclosure with natural finish. The data listed for these power supplies is correct. Just need to add the 150W version.

PERFORMANCE

ILLUMINANCE CONE DIAGRAMS


GL2FL36CWLV

Flood Optic
 36W GL2 LED Bullet
 Color Temperature: 5,900 K




GL2SP36CWLV

Spot Optic
 36W GL2 LED Bullet
 Color Temperature: 5,900 K




GL2FL56CWLV

Flood Optic
 56W GL2 LED Bullet
 Color Temperature: 5,900 K



GL2SP56CWLV

Spot Optic
 56W GL2 LED Bullet
 Color Temperature: 5,900 K



*Lumen output less any shielding

Fixture	Color Temp	36W Lumen Output		56W Lumen Output	
		FL	SP	FL	SP
GL2	CW (5900K)	1831	1716	2988	2873
	NW (4000K)	1658	1554	2752	2646
	WW (3000K)	1617	1515	2638	2537

WARNING: Maintenance performed including the replacement of LED bricks while power is still supplied to the luminaire may result in system failures and will void the warranty.



TECHLIGHT
 INNOVATION IN ILLUMINATION